

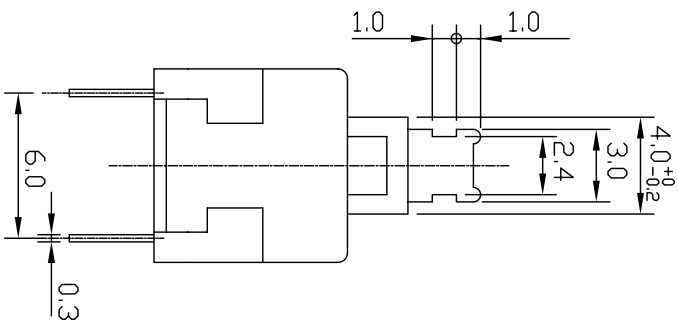
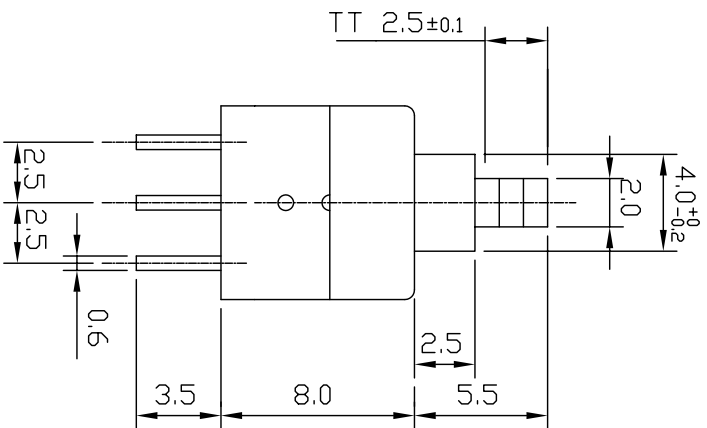
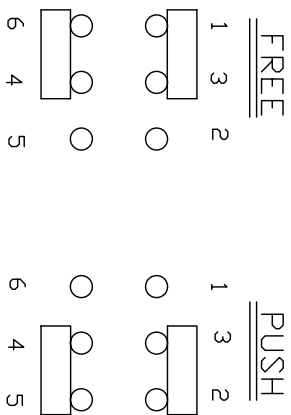


SCHEMATIC



RATING	DC30V 0.1A
WITHSTAND VOLTAGE	AC250V 1 minute
INSULATION RESISTANCE	≥100MΩ DC250V
CONTACT RESISTANCE	≤50mΩ
SOLDERING TEMPER	245±5°C 3 Sec.
MECHANICAL LIFE	100000 cycles
ELECTRICAL LIFE	10000 cycles
TEMPERATURE RANGE	-25°C - +65°C
MOISTURE CONTENT	<85%RH
OPERATION FORCE	160±80gf



修正 REVISION	說明 DESCRIPTION	核准 APPROVAL BY	公差 TOLERANCES	角度 ANGLE	單位 DIMENSION UNIT	圖號 DRAWING NO	材質 MATERIAL	版次 VER	處理 FINISH
△			X±0.1 .XX±0.05	1/2°	mm	BSS800N			A版0次
△			繪圖 DRAWN BY	設計 DESIGNED BY	品名 TITLE				
△			吳美玉	林幼輝	比例尺 SCALE				
△			核對 CHECKED BY	核准 APPROVED BY	日期 DATE				
△					2003.6.20				