
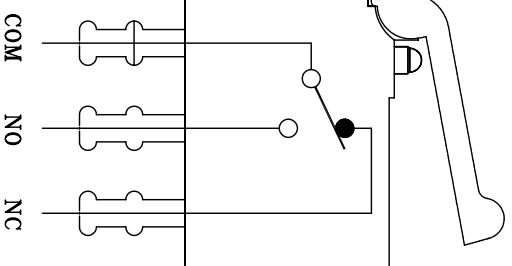


Specification

1. Rating: 30VDC 500mA
2. Operating force: 50gf(Max)
3. Life: 100,000 cycles Min
4. Operating position: 6.7mm±0.5mm
5. Contact resistance: 100m ohms Max(initial)
6. Insulation resistance: 100M ohms Min(at 250VDC)
7. Dielectric withstanding voltage: 500VAC 1 minute
8. Operating temperature: -15°C~+70°C
9. Ambient humidity: 35%~85%RH
10. Malfunction durability: 10 to 55 Hz 1.5mm double amplitude during 2 hours
11. Rest Position: 6.0mm (Max)

Material

1. TERMINAL: BRASS SILVER PLATED
2. Body: PBT
3. Cover: POM
4. Level: PBT
5. Pin: POM
6. Connect: BeCu
7. Contact: Silver

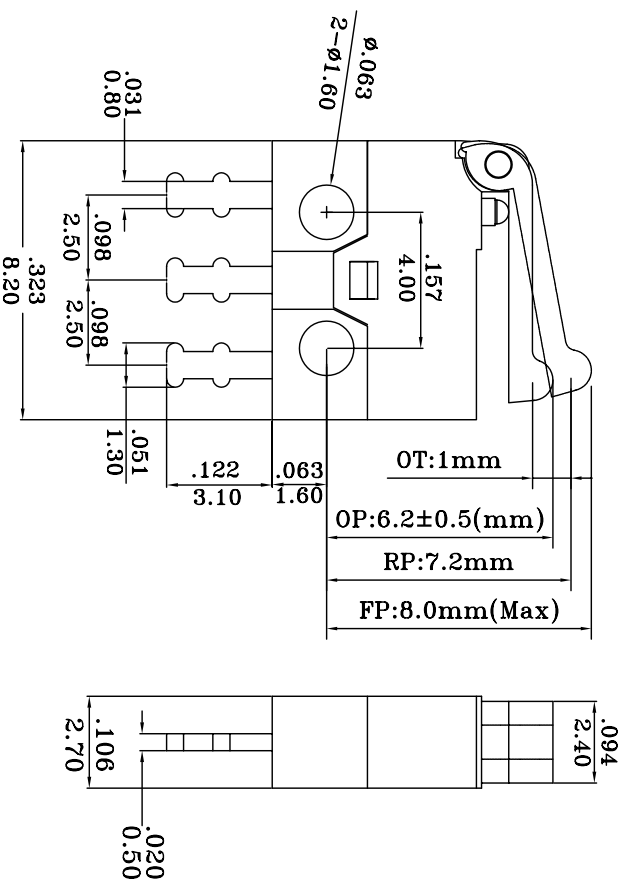

COM NO NC

REVISION	DESCRIPTION	REVISED BY	TOLERANCES: X±0.1		ANGLE 1/2°	SCALE	UNIT	PART NAME	SSM SPEC DRAWING	DWG NO
△			DRAWN BY	吳美玉	ERIC	1:1	mm			
△			CHECKED BY		DATE					
△	2004.08.27 換圖框 重新出圖	吳美玉	APPROVED BY		2003/05/13			PART NO	SSM-001	S0552A

